


DRIVE PIN, UNIVERSAL HEAD

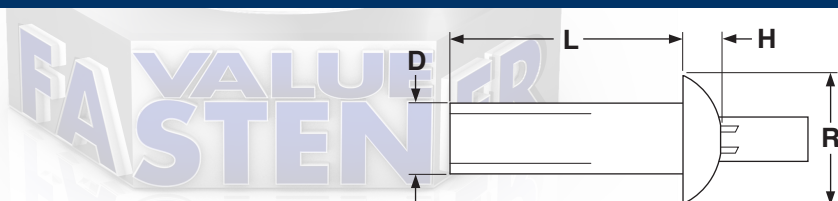


UNIVERSAL HEAD DRIVE PIN RIVETS — ALL ALUMINUM & ALUMINUM/STAINLESS

Part Number	D	L	Grip Range		R	H	Part Number	D	L	Grip Range		R	H
	Shank Diameter (± .001)	Length (+.010, -.005)	Min	Max	Head Diameter (+.005, -.015)	Head Height (± .005)		Shank Diameter (± .001)	Length (+.010, -.005)	Min	Max	Head Diameter (+.005, -.015)	Head Height (± .005)
05031AUSS	.125	.156	.015	.046	.250	.054	10813AUA	.187	.969	.766	.859	.375	.080
05063AUSS		.156	.046	.078			10875AUA		1.031	.828	.922		
05094AUSS		.188	.078	.109			101000AUA		1.156	.953	1.047		
05125AUA		.219	.109	.141			101125AUA		1.281	1.078	1.172		
05156AUA		.250	.141	.172			14094AUA		.250	.047	.141		
05188AUA		.281	.172	.203			14125AUA	.281	.078	.172			
05219AUA		.313	.203	.235			14188AUA	.344	.141	.234			
05250AUA		.344	.235	.266			14250AUA	.406	.203	.297			
05281AUA		.375	.266	.297			14313AUA	.312	.266	.359			
05313AUA		.406	.297	.328			14375AUA	.531	.328	.422			
05344AUA		.438	.328	.360			14438AUA	.594	.391	.484			
05375AUA		.469	.360	.391			14500AUA	.656	.453	.547			
05406AUA		.500	.391	.422			14563AUA	.719	.516	.609			
05438AUSS		.531	.422	.453			14625AUA	.781	.578	.672			
07031AUSS		.156	.188	.015			.046	.312	.067	14688AUA	.250	.844	.641
07063AUSS	.188		.046	.078	14750AUA	.906	.703			.797			
07094AUSS	.219		.078	.109	14813AUA	.969	.766			.860			
07125AUA	.250		.109	.141	14875AUA	1.031	.828			.922			
07156AUA	.281		.141	.172	14938AUA	1.094	.891			.985			
07188AUA	.313		.172	.203	141000AUA	1.156	.953			1.047			
07219AUA	.344		.203	.234	141125AUA	1.281	1.078			1.172			
07250AUA	.375		.234	.266	141375AUA	1.531	1.328			1.422			
07281AUA	.406		.266	.297	31188AUA	.438	.132			.242			
07313AUA	.438		.297	.328	31281AUA	.531	.226			.336			
07344AUA	.469		.328	.360	31375AUA	.625	.320			.430			
07406AUA	.531		.391	.422	31469AUA	.719	.414			.523			
07438AUSS	.563		.422	.453	31563AUA	.813	.508			.617			
07500AUSS	.625		.484	.515	31656AUA	.906	.602			.711			
07531AUSS	.656		.515	.546	31750AUA	1.000	.696			.805			
07563AUSS	.688	.546	.578	31844AUA	1.094	.790	.899						
07625AUSS	.750	.609	.640	31938AUA	1.188	.884	.993						
All sizes in gray-shaded area have stainless steel pins.							311031AUA	1.282	.978	1.087			
10094AUA	.187	.250	.047	.141	.375	.080	37188AUA	.375	.500	.125	.250	.750	.166
10125AUA		.281	.078	.172			37281AUA		.594	.219	.344		
10188AUA		.344	.141	.234			37375AUA		.688	.313	.438		
10250AUA		.406	.203	.297			37469AUA		.781	.406	.531		
10313AUA		.469	.266	.359			37563AUA		.875	.500	.625		
10375AUA		.531	.328	.422			37656AUA		.969	.594	.719		
10438AUA		.594	.391	.484			37750AUA		1.063	.688	.813		
10500AUA		.656	.453	.547			37844AUA		1.157	.782	.907		
10563AUA		.719	.516	.609			37938AUA		1.250	.875	1.000		
10625AUA		.781	.578	.672			371031AUA		1.345	.970	1.094		
10688AUA		.844	.641	.734									

RIVETS

DRIVE PIN, UNIVERSAL HEAD

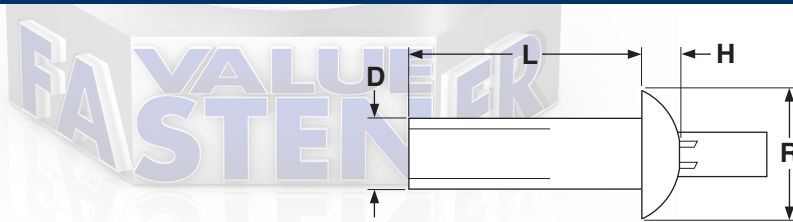

UNIVERSAL HEAD DRIVE PIN RIVETS—STEEL

Part Number	D	L	Grip Range		R	H	Part Number	D	L	Grip Range		R	H
	Shank Diameter (± .001)	Length (+.010, -.005)	Min	Max	Head Diameter (+.005, -.015)	Head Height (± .005)		Shank Diameter (± .001)	Length (+.010, -.005)	Min	Max	Head Diameter (+.005, -.015)	Head Height (± .005)
37188SUS	.375	.500	.125	.250	.750	.166	37375SUS	.375	.688	.313	.438	.750	.166
37281SUS		.594	.219	.344									

Description	A two-piece fastening system consisting of (1) a self-contained pin within (2) the body of a tubular-shaped rivet with a dome-shaped head. The head is approximately twice as wide as the shank diameter. The top of the rivet has an opening through which the pin protrudes. The opposite end of the rivet is enclosed but with two cross-wise slits cut into the body extending from the tip, up the shank a limited distance.	
Applications/ Advantages	Drive pin rivets can join two or more pieces of low-density metal without the use of special installation tools. The rivet is inserted into pre-drilled, aligned holes and is set in place by striking the top of the pin with a hammer so that the pin is flush with the top of the head. This action causes the pin to drive through the opposite end and flare out in four directions creating a head on the blind side of the fastening. Drive pins have superior shear strength to standard break stem rivets because the pin remains inside of the installed rivet for its entire length. The universal head is the most versatile variety of drive pin, giving the neat, finished look of the brazier but with a lower head profile.	
Material	Aluminum Body	Steel Body
	Body: Aluminum alloy 2117 H15 or equivalent alloy Pin (1/8" & 5/32" diam): 302 series Stainless Steel Pin (3/16" thru 3/8" diam): Aluminum alloy 2024 T4 or equivalent alloy	Body: AISI 1006 - 1008 or equivalent steel, zinc-plated Pin: AISI 1008 or equivalent steel, zinc-plated
Shear Strength (approximate)	1/8" diameter: 480 lbs. (w/Stainless pin) 5/32" diameter: 715 lbs. (w/Stainless pin) 3/16" diameter: 700 lbs. (w/Aluminum pin) 1/4" diameter: 1030 lbs. (w/Aluminum pin) 5/16" diameter: 1490 lbs. (w/Aluminum pin) 3/8" diameter: 2300 lbs. (w/Aluminum pin)	3/8" diameter: 3000 lbs. (w/Steel pin)
Tensile Strength (approximate)	1/8" diameter: 175 lbs. (w/Stainless pin) 5/32" diameter: 310 lbs. (w/Stainless pin) 3/16" diameter: 360 lbs. (w/Aluminum pin) 1/4" diameter: 815 lbs. (w/Aluminum pin) 5/16" diameter: 1480 lbs. (w/Aluminum pin) 3/8" diameter: 1795 lbs. (w/Aluminum pin)	3/8" diameter: 2500 lbs. (w/Steel pin)

PART NUMBER COMPARISON-UNIVERSAL HEAD DRIVE PINS, STEEL BODY/STEEL PIN

Catalog	Indux	Southco®	Catalog	Indux	Southco®
37188SUS	31-12-06S	38-112-06-91	37375SUS	31-12-12S	38-112-12-91
37281SUS	31-12-09S	38-112-09-91			

Southco® is a registered trademark of Southco Inc. Kanebridge does not sell Southco® products.

DRIVE PIN, UNIVERSAL HEAD

PART NUMBER COMPARISON-UNIVERSAL HEAD DRIVE PINS, ALUMINUM BODY/STAINLESS PIN

Catalog	Indux	Southco®	Catalog	Indux	Southco®
05031AUSS	31-04-01	38-104-01-13	07094AUSS	31-05-03	38-105-03-13
05063AUSS	31-04-02	38-104-02-13	07125AUA	31-05-04	38-105-04-13
05094AUSS	31-04-03	38-104-03-13	07156AUA	31-05-05	38-105-05-13
05125AUA	31-04-04	38-104-04-13	07188AUA	31-05-06	38-105-06-13
05156AUA	31-04-05	38-104-05-13	07219AUA	31-05-07	38-105-07-13
05188AUA	31-04-06	38-104-06-13	07250AUA	31-05-08	38-105-08-13
05219AUA	31-04-07	38-104-07-13	07281AUA	31-05-09	38-105-09-13
05250AUA	31-04-08	38-104-08-13	07313AUA	31-05-10	38-105-10-13
05281AUA	31-04-09	38-104-09-13	07344AUA	31-05-11	38-105-11-13
05313AUA	31-04-10	38-104-10-13	07406AUA	31-05-13	38-105-13-13
05344AUA	31-04-11	38-104-11-13	07438AUSS	31-05-14	38-105-13-13
05375AUA	31-04-12	38-104-12-13	07500AUSS	31-05-16	38-105-16-13
05406AUA	31-04-13	38-104-13-13	07532AUSS	31-05-17	38-105-17-13
05438AUSS	31-04-14	38-104-14-13	07563AUSS	31-05-18	38-105-18-13
07031AUSS	31-05-01	38-105-01-03	07625AUSS	31-05-20	38-105-20-13
07063AUSS	31-05-02	38-105-02-13			

UNIVERSAL HEAD Drive Pin Rivets, Aluminum

Kanebridge	Indux	Southco®	Kanebridge	Indux	Southco®
10094AUA	31-06-03	38-106-02-16	14750AUA	31-08-24	38-108-24-16
10125AUA	31-06-04	38-106-04-16	14813AUA	31-08-26	38-108-26-16
10188AUA	31-06-06	38-106-06-16	14875AUA	31-08-28	38-108-28-16
10250AUA	31-06-08	38-106-08-16	14938AUA	31-08-30	38-108-30-16
10313AUA	31-06-10	38-106-10-16	141000AUA	31-08-32	38-108-32-16
10375AUA	31-06-12	38-106-12-16	141125AUA	31-08-36	38-108-36-16
10438AUA	31-06-14	38-106-14-16	141375AUA	31-08-44	38-108-44-16
10500AUA	31-06-16	38-106-16-16	31188AUA	31-10-06	38-110-06-16
10563AUA	31-06-18	38-106-18-16	31281AUA	31-10-09	38-110-09-16
10625AUA	31-06-20	38-106-20-16	31375AUA	31-10-12	38-110-12-16
10688AUA	31-06-22	38-106-22-16	31469AUA	31-10-15	38-110-15-16
10750AUA	31-06-24	38-106-24-16	31563AUA	31-10-18	38-110-18-16
10813AUA	31-06-26	38-106-26-16	31656AUA	31-10-21	38-110-21-16
10875AUA	31-06-28	38-106-28-16	31750AUA	31-10-24	38-110-24-16
101000AUA	31-06-32	38-106-32-16	31844AUA	31-10-27	38-110-27-16
101125AUA	31-06-36	38-106-36-16	31938AUA	31-10-30	38-110-30-16
14094AUA	31-08-03	38-108-02-16	311031AUA	31-10-33	-
14125AUA	31-08-04	38-108-04-16	37188AUA	31-12-06	38-112-06-16
14188AUA	31-08-06	38-108-06-16	37281AUA	31-12-09	38-112-09-16
14250AUA	31-08-08	38-108-08-16	37375AUA	31-12-12	38-112-12-16
14313AUA	31-08-10	38-108-10-16	37469AUA	31-12-06	38-112-15-16
14375AUA	31-08-12	38-108-12-16	37563AUA	31-12-18	38-112-18-16
14438AUA	31-08-14	38-108-14-16	37656AUA	31-12-21	38-112-21-16
14500AUA	31-08-16	38-108-16-16	37750AUA	31-12-24	-
14563AUA	31-08-18	38-108-18-16	37844AUA	31-12-27	-
14625AUA	31-08-20	38-108-20-16	37938AUA	31-12-30	-
14688AUA	31-08-22	38-108-22-16	371031AUA	31-12-33	-