


# Thumb & Wing Screws

No Shoulder

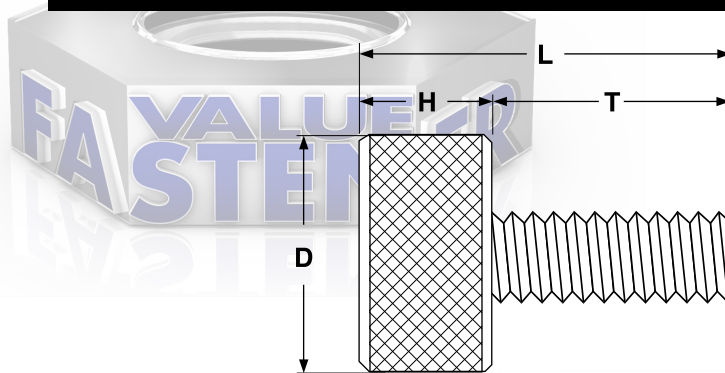

## KNURLED THUMB SCREWS

Thread Size x Thread Length	D		H		L		T	
	Head Diameter		Head Height		Overall Length		Thread Length	
	Max	Min	Max	Min	Max	Min	Max	Min
4-40 x 5/16	.332	.312	.203	.173	.515	.485	.322	.302
4-40 x 3/8	.332	.312	.203	.173	.577	.547	.385	.365
4-40 x 7/16	.332	.312	.203	.173	.640	.610	.448	.428
4-40 x 1/2	.332	.312	.203	.173	.703	.673	.510	.490
6-32 x 5/16	.332	.312	.203	.173	.515	.485	.322	.302
6-32 x 3/8	.332	.312	.203	.173	.577	.547	.385	.365
6-32 x 7/16	.332	.312	.203	.173	.640	.610	.448	.428
6-32 x 1/2	.332	.312	.203	.173	.703	.673	.510	.490
8-32 x 3/8	.395	.375	.203	.173	.577	.547	.385	.365
8-32 x 7/16	.395	.375	.203	.173	.640	.610	.448	.428
8-32 x 1/2	.395	.375	.203	.173	.703	.673	.510	.490
8-32 x 9/16	.395	.375	.203	.173	.765	.735	.572	.552
8-32 x 5/8	.395	.375	.203	.173	.827	.797	.635	.615
10-32 x 3/8	.458	.438	.203	.173	.577	.547	.385	.365
10-32 x 7/16	.458	.438	.203	.173	.640	.610	.448	.428
10-32 x 1/2	.458	.438	.203	.173	.703	.673	.510	.490
10-32 x 9/16	.458	.438	.203	.173	.765	.735	.572	.552
10-32 x 5/8	.458	.438	.203	.173	.827	.797	.635	.615

<b>Description</b>	A one-piece screw with a cylindrically-shaped head and a fully-threaded shank with a unified thread pitch. The head has a smooth, flat top and a roughened surface around its full circumference.	
<b>Applications / Advantages</b>	For use in applications where periodic manual adjustment is required and where finger pressure can supply sufficient tightening torque.	
<b>Material</b>	303 Stainless Steel	Aluminum Alloy 6061 T6
<b>Plating</b>	Parts are typically supplied without any additional coating or finish.	